


VHS valve for parallel and base-connection radiators, with integral pre-setting and shut-off/drain device




Application

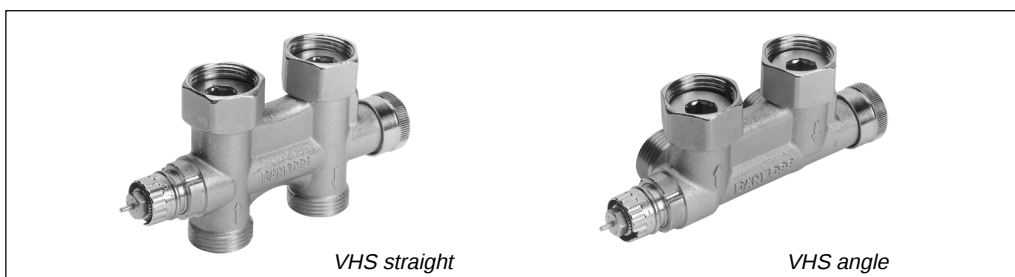

The VHS is the ideal control valve for modern base-connection radiators, as well as for universal or bathroom radiators with connection distances of 50mm between flow and return. Quick and easy to install, it will accept standard Danfoss snap-lock sensor elements.

The VHS incorporates an integral presetting mechanism, for quick and accurate system balancing, and a combined shut-off/drain device. Connection to copper, soft steel, alupex and PEX plastic pipes can be carried out with Danfoss clamping joints. An optional fill-and-drain fitting is available.


To avoid the occurrence of scale and corrosion in the system, the composition of the heating water should comply with VDI guidelines 2035.

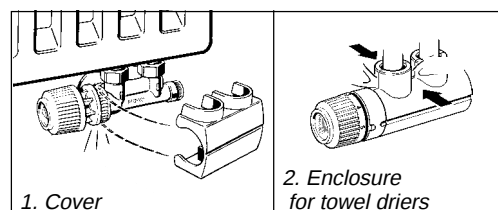

To ensure an appealing finish different types of valve covers are available:

1. In white ABS material (RAL 9010) which is suitable for wet lacquering or in black PPO suitable for electrostatic powder lacquering.
2. Enclosure designed for towel driers with angled valves.

System layout

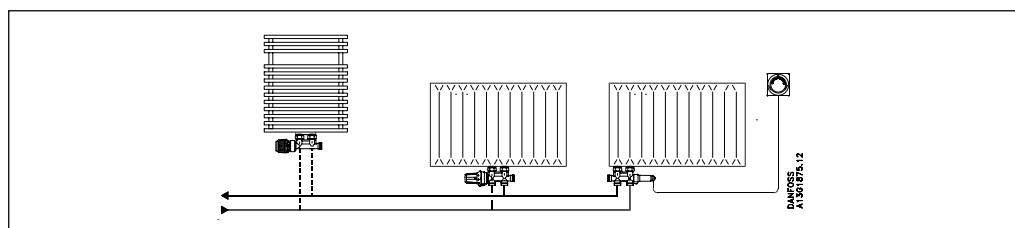

Ordering and data

Type: VHS-UN 15		Connection (ISO 228-1)		Settings								
Version	Code no.	Radiator	System	k _v -values ¹⁾³⁾								
Angular	013G4741	R 1/2	G 3/4A	1	2	3	4	5	6	7	N	kvs
Straight	013G4742			0.02	0.04	0.07	0.12	0.19	0.27	0.33	0.48	0.57
Angular	013G4743	G 3/4										
Straight	013G4744											

1) The k_v values represent the flow volume (Q) in m³/h at a pressure drop (Δp) through the valve of 1 bar.
 $k_v = Q : \sqrt{\Delta p}$. At setting N, the k_v-values are given for X_p = 2 K. At lower presettings, X_p is reduced for the k_v-values stated to 0.5 K at preset value 1. The k_v-values state Q at full flow, i.e. for a fully opened valve.

2) The stated maximum technical differential pressure indicates the limit for maintaining optimum control. For low-noise operation, system differential pressures should be held within the recommended range. Pumps should never be oversized; select those that generate just sufficient pressure to circulate the required volume of water. From experience, a differential pressure of 0.05-0.2 bar across the valve is adequate in most systems. In systems where it is too high, a Danfoss differential pressure regulator can be used to reduce it.

3) If sensors RAW/RAS/RAE/ remote setting unit is used, the P-band increases by a factor of 1.6. Manufacturer's value is at "N" setting.

	k _v at X _p = 2	k _{vs}
VHS-UN 15	0.39	0.57

Temperature and pressures ²⁾

Max. water temperature	120 °C
Recommended differential pressure	0.05-0.2 bar
Max. technical differential pressure	0.6 bar
Testing pressure	16 bar
Max. operating pressure	10 bar

Accessories


Product	Code no.
 Cover* for VHS valve for panel radiators, straight pattern White RAL 9016, suitable for wet lacquering**	013G4774
 Cover* for VHS valve for panel radiators, angle pattern White RAL 9016, suitable for wet lacquering**	013G4775
 Cover* for VHS valve for towel rail radiators, straight pattern White RAL 9010, suitable for wet lacquering**	013G4672
 Cover* for VHS valve for towel rail radiators, straight pattern White RAL 9016, suitable for wet lacquering**	013G4674
 Cover* for VHS valve for towel rail radiators, angle pattern White RAL 9010, suitable for wet lacquering**	013G4671
 Cover* for VHS valve for towel rail radiators, angle pattern White RAL 9016, suitable for wet lacquering**	013G4673
 Cover for VHS valve, straight pattern, chrome	013G4780
 Cover for VHS valve, angle pattern, chrome	013G4779
 Enclosure* for VHS valve for towel rail radiators, angle pattern White RAL 9010, suitable for wet lacquering**	013G4751
 Enclosure* for VHS valve for towel rail radiators, angle pattern White RAL 9016, suitable for wet lacquering**	013G4755
 Sealing cone incl. seal for valve radiator with 3/4" ext. thread (20 pcs.)	003L0294
 Self-sealing connection nipple for valve radiator with G½ int. thread (20 pcs.)	003L0295
 Double rosette (PVC) for pipe diameter Ø 12-24 mm (min. distance 50 mm)	192H0161
 Manual handwheel for all RA type valves (valve diff. pressure max. 0.6 bar)	013G5002
 Fill-and-drain fitting, not nickel-plated, with 3/4" ext. thread and hose nozzle	003L0152
 Connection bracket for sensors without snap-lock connection (10 pcs.)	013G4925
 Cover for VHS, nickel-plated	003L0153

* Requires a sensor with snap-lock.

**Guidelines for lacquering are enclosed in the product carton.

VHS is suited for connection of copper, soft steel, PE-X plastic and aluminium alloys. Connection is made with the help of Danfoss clamping joints.

Pre-setting

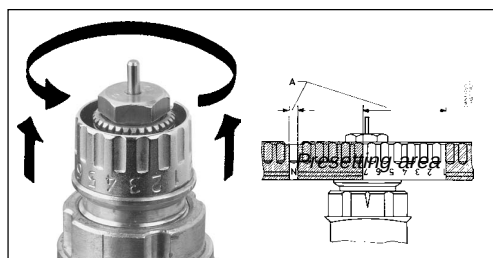


Danfoss pre-settable valve bodies incorporate easy setting adjustment collars with clearly engraved setting markers from **1** - **7** and **N**. Setting can be made quickly and precisely, without the need for tools, as follows:

- Remove protective cap or sensor element
- Lift setting collar
- Turn anti-clockwise to the desired engraved setting value. The setting mark always points directly to the radiator connection point.
- Allow setting collar to fall back to its original position

Preset levels can be selected in 0.5 increments between 1 and 7 (see chart on page 3 for flow rates). At setting **N** the valve is fully open (flushing option).

Settings in the hatched areas should be avoided. A secure method of fitting sensing elements protects against unauthorised tampering with the preset values.

Capacity

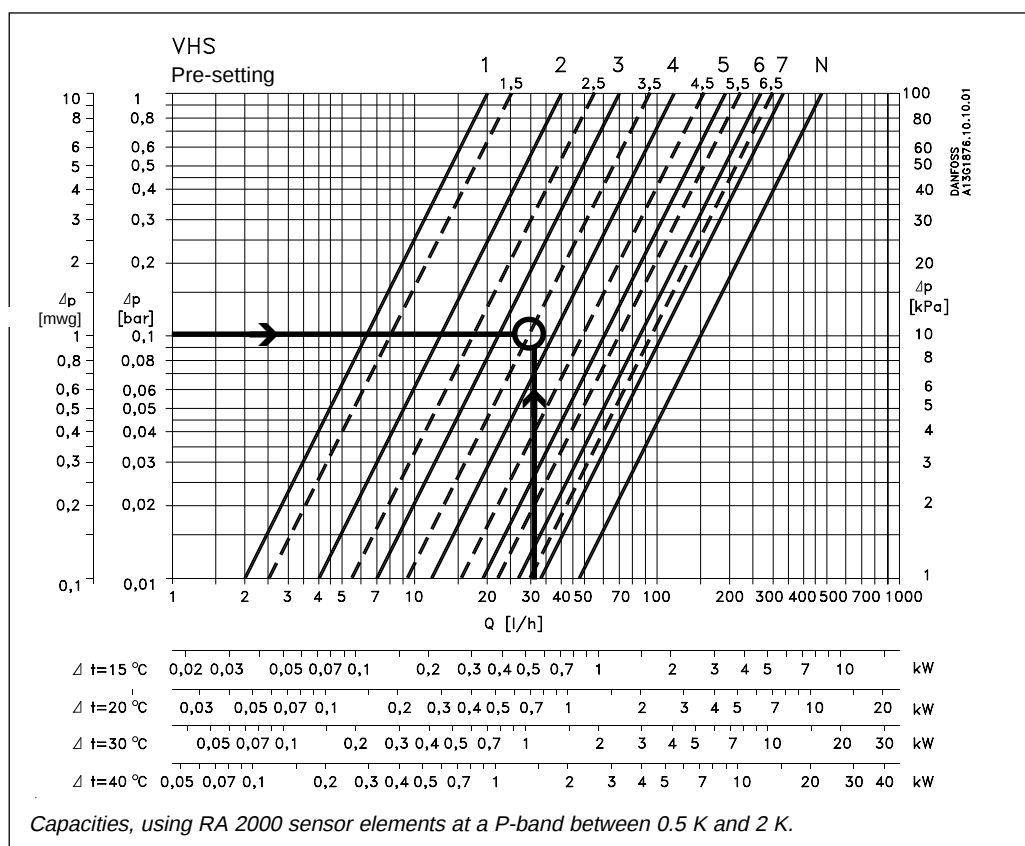

The capacity range of the VHS matches today's radiator performance figures.

The amount by which the room temperature changes during operation is termed the P-band of a valve. This change is necessary to move the valve from the closed position to that at which the required volume flow (depending on dimensions) is achieved.

With the excellent control performance of RA2000 and RAW sensing elements, the valve should be sized for a P-band between 0.5 and 2K to achieve optimum energy saving under 'small room' temperature change conditions.

Example of valve sizing

Heat requirement: $Q = 0.7 \text{ kW}$

Temperature spread: $\Delta T = 20^\circ\text{C}$

Water volume through radiator:

$$Q = \frac{0,7}{20 \times 1,16} = 0,03 \text{ m}^3/\text{h} = 30 \text{ litres/h}$$

Pressure drop across the valve: $\Delta p = 0.1 \text{ bar} = 1 \text{ mWG}$


Setting at valve: VHS-UN 15: 3.5

Alternatively, the setting can be read directly from the "Ordering and data" table:

$$k_v = \frac{Q \text{ (m}^3/\text{h)}}{\sqrt{\Delta p \text{ (bar)}}}$$

Draining the radiators

Please note:
The static pressure must not exceed 10 bar

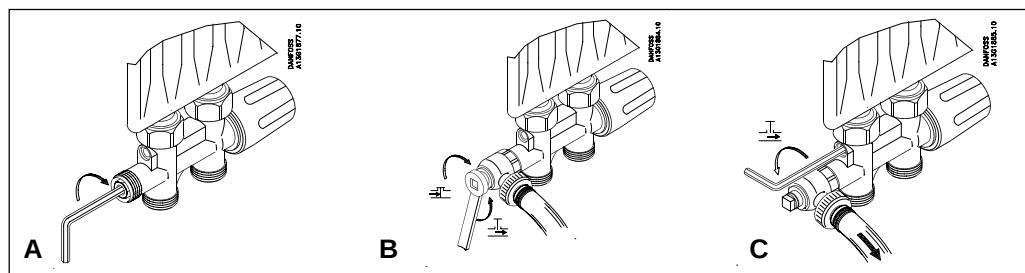

Shut-off and draining

If the sensor element is removed temporarily while the system is under pressure, it should be replaced by an appropriate handwheel – available from Danfoss – to ensure positive and safe shut-off.


To drain the radiator, first unscrew and remove the valve's metal cover. Then firmly shut off the return with an Allen key (see A).

Fix the drain fitting in position. Drain by turning the square headed drain screw to the left (see B). The rising flow pipe in the radiator can be drained also by loosening the inner hexagonal screw (see C).

The accompanying hose nozzle can be rotated freely.


Design

- 1. Radiator
- 2. Sealing cone
- 3. Valve insert, presettable, type RA-UN
- 4. Stuffing box
- 5. Draining screw for rising pipe
- 6. Block-off/drain of return
- 7. Connection nipple (self-sealing)
- 8. Flat packing




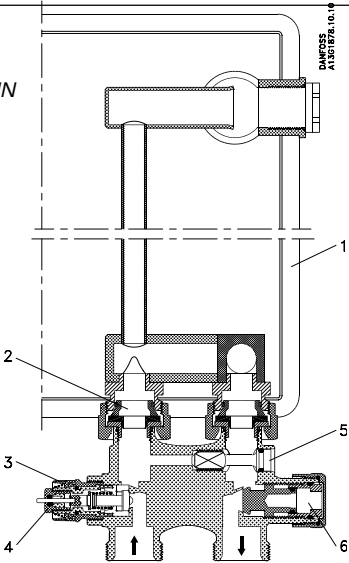


Materials used for parts in water contact


Valve housing and other metal parts	Ms 58
O-rings	EPDM



Dimensions

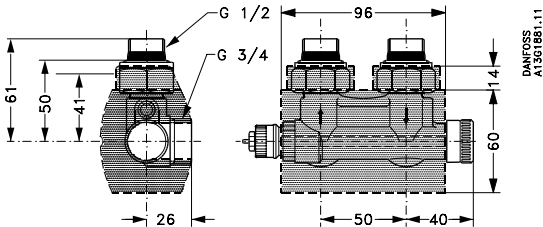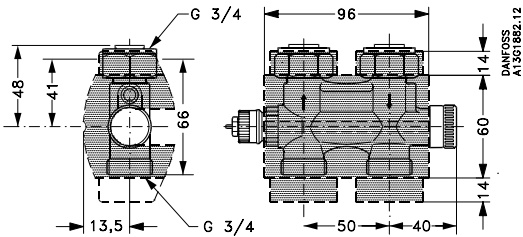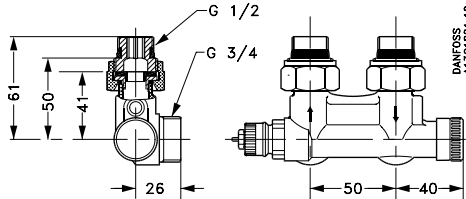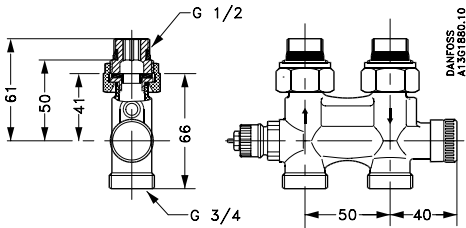

VHS straight pattern
1/2 or 3/4" radiator connection

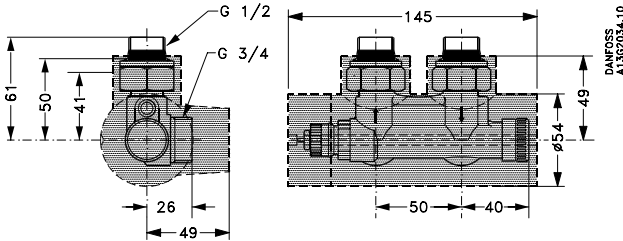

VHS angle pattern
1/2 or 3/4" radiator connection

Covers are shaded grey.

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.



Danfoss A/S
Hårupvænget 11
Hårup
DK-8600 Silkeborg
Telefon: +45 86 80 36 66
Telefax: +45 86 80 19 66